



**barkman™**

**Rosetta Landscape Kits**

Dimensional Square Firepit Instruction Manual

# IMPORTANT: READ PRIOR TO INSTALLATION

It is the responsibility of the consumer to read and follow the proceeding information.

1. The consumer is responsible for reviewing the local regulations pertaining to the installation and use of this product. Please confirm that use of this product is in compliance with the by-laws, regulations, building codes and laws of your jurisdiction before using.
2. Make sure that you locate your respective gas lines, wires, water pipes, and/or any above ground and underground services in your area and install your firepit in the proper distance away from them. Check with your provider for location and distance requirements prior to installation.
3. Check with your insurance provider concerning the installation, use, value implications and/or any other considerations in regards to your Dimensional Square Firepit Kit.
4. Firepit is not suitable for large fires. Fire size should not allow flame to contact the top layer. Firepit should not be placed directly on concrete products as high heat can adversely affect the integrity of the product.

**IMPORTANT:** Be careful not to touch the steel liner while it's hot. It can still retain heat long after the fire has been extinguished.

## Base Preparation

**If installing firepit on an unstructured base, please ensure to follow these steps:**


1. Mark out the location for your firepit. Area should be slightly larger than 44" x 44" as dimensions of kit are nominal.
2. Excavate for drain stone base (approximately 6").
3. Fill excavated area with drain stone, level and compact. The finished height of the firepit will be approx. 14.25" above base.

## Instructions

### Steps

1. Place and center steel firepit liner on prepared base.
2. Form three alternating layers as shown using Dimensional Wall Straight blocks. Check that stones are level. The tall steel liner should hang directly on the blocks.

**Note:** This manual was updated in June 2018. Check [www.barkmanconcrete.com/resources](http://www.barkmanconcrete.com/resources) for any manual updates.

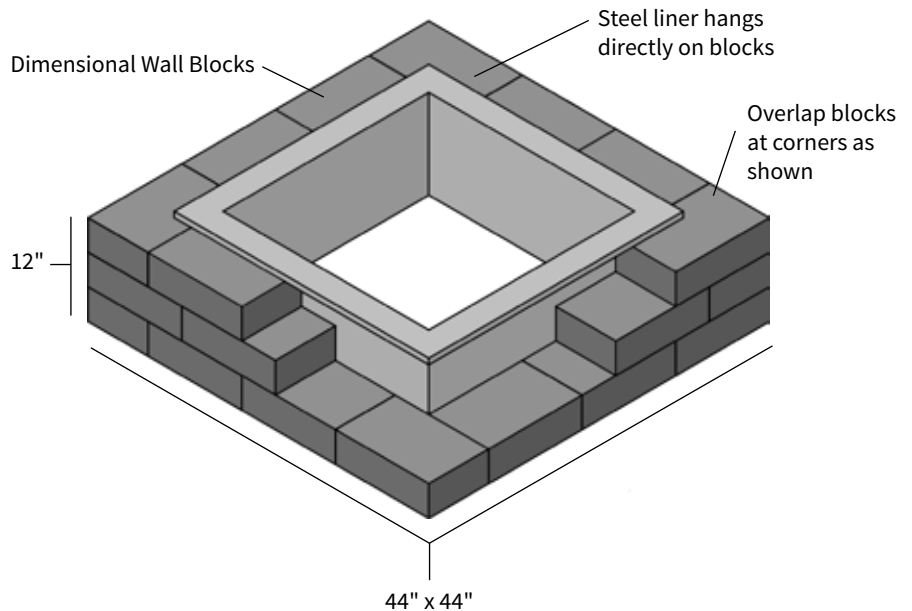

### Steinbach Office

152 Brandt Street  
Steinbach, MB R5G 0R2  
T (800)-461-2278  
F (204)-326-5915

### Winnipeg Office

901 Gateway Road  
Winnipeg, MB R2K 3L1  
T (800)-342-2879  
F (204)-663-4854

### Vancouver Office

2104-290 Newport Drive  
Port Moody, BC V3H 5N2  
T (778)-689-7670  
F (604)-949-0321

### Calgary Office

813 McCool St. Box 1136  
Crossfield, AB T0M 0S0  
T (403)-946-4630  
F (403)-946-4631

