


TOP VIEW

(3) 15M BARS CONT.


GALVANIZED STRAP

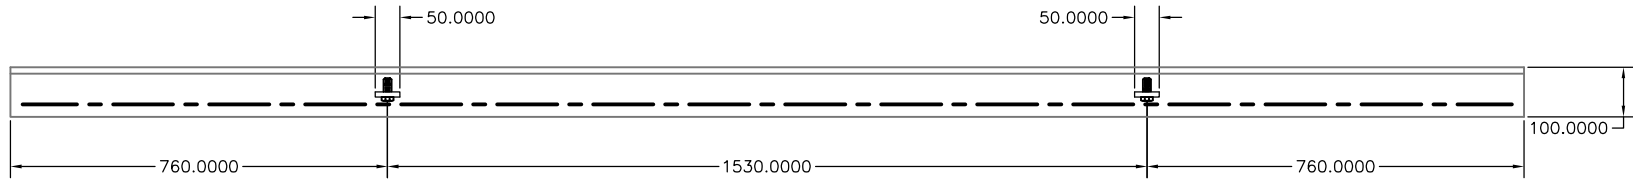

SIDE VIEW


NOTES

- COMPRESSIVE STRENGTH @ 28 DAYS TO BE 40 MPa or 5800 psi.
- CEMENT TO BE LAFARGE TYPE 10 SF OR EQUAL
- WEIGHT OF SINGLE PAD = 250 Kg or 552 lbs.

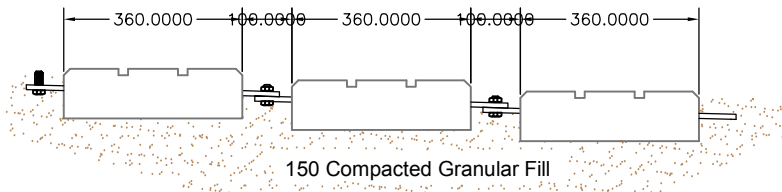

150 Compacted Granular Fill

ASSEMBLY

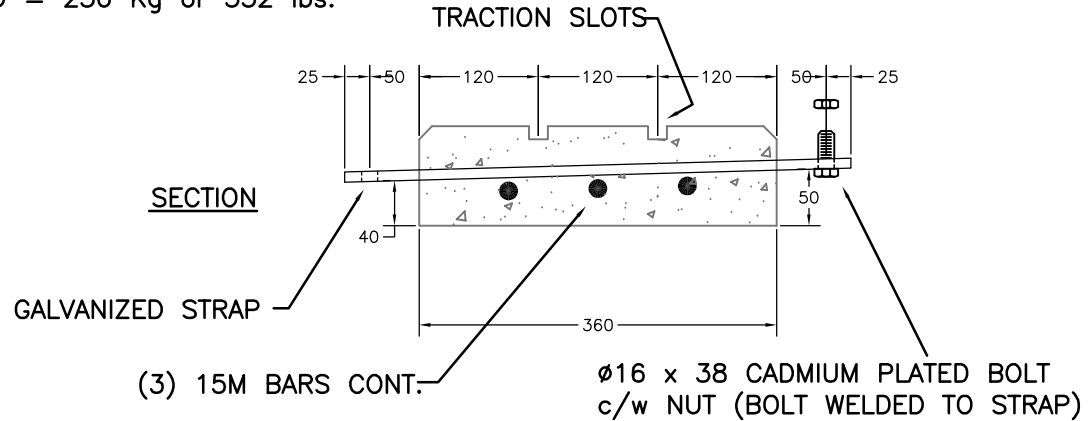


SECTION

GALVANIZED STRAP


(3) 15M BARS CONT.

Ø16 x 38 CADMIUM PLATED BOLT
c/w NUT (BOLT WELDED TO STRAP)

 152 Brandt Street, Steinbach, MB R5G 0R2 T (204) 326 3445 or 1 800 461 2278 F (204) 326 5915 barkmanconcrete.com	CUSTOMER		PART NUMBER					
	barkman STD PRODUCT		-					
	PROJECT		INITIALS					
	BOAT RAMP - 10'		DRAWN BY		DATE			
	TITLE		CHECKED BY		DATE			
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BARKMAN CONCRETE LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BARKMAN CONCRETE LTD. IS PROHIBITED.		PRODUCT DETAILS		WEIGHT (lbs)	SCALE	PAPER SIZE	SHT NO.	REV. #
				N.T.S.		8 1/2 X 11 (A)	1	0



10' BOAT RAMP

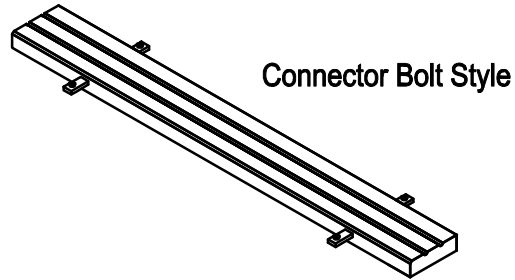

Product Code: 105669
Size: 120" x 14" W x 4" H
Weight: 565 lb.
Packaging: 2 rows stacked 4 high
Material:

- 1) Concrete
 - 1 boat ramp pad
- 2) Lifting Lug
 - 2 stiff wire lifting lug
(cast into concrete
cut off after installation)

CONCRETE

Size: 120" L x 14" W x 4" H
Weight: 565 lb.
Colors: Natural Gray
Material:

- 1) Concrete:
 - minimum 5800 psi compressive
strength concrete
- 2) Reinforcing
 - 15 mm Rebar

INSTALLATION NOTES

- Pads are to be placed approximately 4" apart to allow for bolting ramps together with hardware supplied. Position pads so that welded bolt lines up with hole on next pad.