

# Keystone Compac® III Wall



## Proven Performance

Featuring unrivalled aesthetic options, cost saving versatility and proven wall performance, Keystone Compac® III – Hewstone is favoured by architects, engineers and contractors worldwide. Using the proven Keystone Compac® III pin connection system, it is the perfect solution for gravity walls up 4 feet in height and large-scale projects in excess of 60'h.



Garden Walls



Grand Walls


### SIZES (H X W X D)



Standard  
203 x 457 x 305 mm  
8 x 18 x 12 in



Corner  
203 x 457.2 x 228.6 mm  
8 x 18 x 9 in



Coping  
100 x 450 x 300 mm  
3.94 x 17.71 x 11.81 in

### COLOURS



Ash




Charcoal



Sierra Grey

## PATTERNS

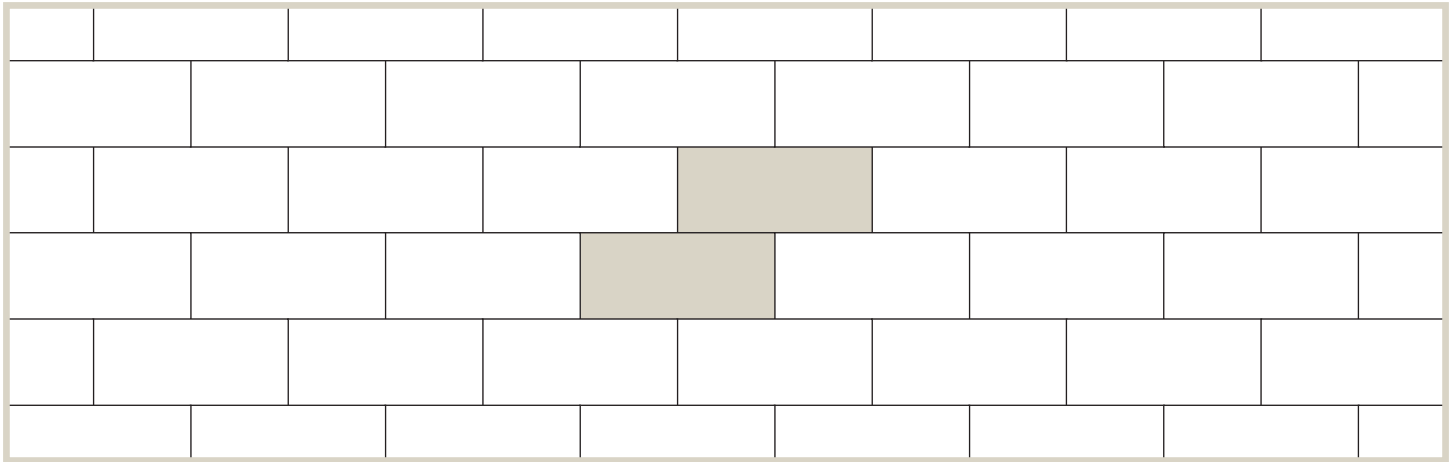

Pattern 1

## INSTALLATION NOTES

Use 2 fiberglass pins per block to connect them together except on the top row where the caps are placed. Keystone Compac® III – Hewstone is sold in full bundles only.

For more in depth installation guides for specific products, visit [BarkmanConcrete.com](http://BarkmanConcrete.com).

## BUNDLE CONFIGURATIONS

DESCRIPTION	UNIT					PALLET ROW				PALLET			
	SIZE (H X W X D)		FACE AREA		WEIGHT	NO. OF UNITS	FACE AREA		NO. OF UNITS	NO. OF ROWS	FACE AREA		WEIGHT
	MM	IN	M <sup>2</sup>	SQ FT	LB		M <sup>2</sup>	SQ FT			M <sup>2</sup>	SQ FT	
Standard	203 x 457 x 305	8 x 18 x 12	0.09	1	73	-	-	-	30	-	2.79	30	2190
Corner	203 x 457.2 x 228.6	8 x 18 x 9	-	-	104	-	-	-	18	-	-	-	1872
Coping	100 x 450 x 300	3.94 x 17.71 x 11.81	.045	.4845	66	24	10.97	36 lin ft.	48	2	21.95	72 lin. ft	3168
Alignment Pins	13 x 133	.5 x 5.25	-	-	0.08	-	-	-	100/box	-	-	-	7.9/box

### Steinbach Office

152 Brandt Street  
Steinbach, MB R5G 0R2  
T (800)-461-2278  
F (204)-326-5915

### Winnipeg Office

901 Gateway Road  
Winnipeg, MB R2K 3L1  
T (800)-342-2879  
F (204)-663-4854

### Vancouver Office

2104-290 Newport Drive  
Port Moody, BC V3H 5N2  
T (778)-689-7670  
F (604)-949-0321

### Calgary Office

813 McCool St. Box 1136  
Crossfield, AB T0M 0S0  
T (403)-946-4630  
F (403)-946-4631

